


PH365 – Air and Water

 polyhose.com/products/industrial-hose/ph365-air-and-water/

Application

Specially designed For Tyre Inflation, Light engineering industry and general purpose air line.

□

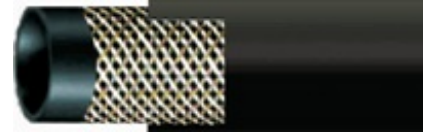

Code	Dash size	DN	Hose I.D. (Nom.)		Hose O.D. (Nom.)		Working Pressure		Min. Burst Pressure		Min. Bend Radius	
			inch	mm	inch	mm	psi	bar	psi	bar	mm	inch
PH365-4	-4	6	1/4	6.5	0.51	13.0	230	16	920	64	50	2.00
PH365-5	-5	8	5/16	8.0	0.59	15.0	230	16	920	64	75	3.00
PH365-6	-6	10	3/8	9.5	0.65	16.5	230	16	920	64	100	4.00
PH365-8	-8	12	1/2	12.7	0.85	21.5	230	16	920	64	100	4.00
PH365-12	-12	20	3/4	19.0	1.08	27.5	150	10	600	40	125	5.00
PH365-16	-16	25	1	25.4	1.36	34.5	150	10	600	40	150	5.00

Applicable Standard:

Standard: Polyhose proprietary product Exceeds IS 446-1980 – Type 3 & IS 446-1980 – Type 1

Construction:

Core: Black, plasticised PVC

Reinforcement: Polyester textile yarn braiding

Cover: Black, abrasion resistant thermo-compound. Other colors on request

Temperature Range:

Continuous: -10°C to +60°C

